

Globalyst 630



PENTIUM MINITOWER

Globalyst 630



“Pentium performance with expandability.”

DIMENSIONS

15.5 kg	Weight	34 lb
444 mm	Height	17.5 inches
178 mm	Width	7.0 inches
419 mm	Depth	16.5 inches

0645 55 66 66


for the cost of a local call.

Hours: 9:00am to 6:00pm weekdays

STANDARD CONFIGURATION INCLUDES:

- MINI TOWER CABINET
- MAINBOARD
- 1MB VIDEO MEMORY
- DOS & WINDOWS FOR WORKGROUPS PRE-INSTALLED
- MOUSE
- KEYBOARD
- PC&C VISTUUM SHARE SOFTWARE PRE-INSTALLED
- 1.44MB FLEX DISK DRIVE
- ZIF SOCKET FOR FUTURE PENTIUM PROCESSOR TECHNOLOGY
- PLUG & PLAY UTILITIES

Features

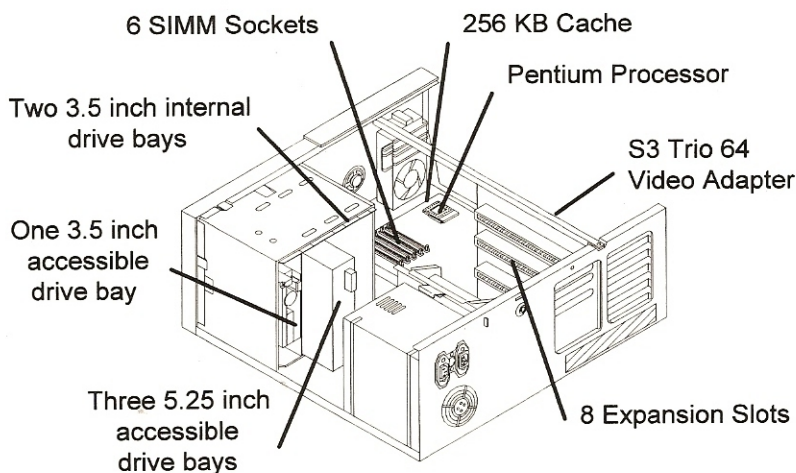

Standard Configurations

Processor	Hard Drive	RAM	Cache	CD ROM	Part No.	Price (£)
Pentium 75	540MB	16MB	256KB	No	3348-3053	1685
Pentium 75	850MB	16MB	256KB	No	3348-3054	1740
Pentium 90	850MB	8MB	256KB	No	3348-3061	1820
Pentium 90	1.08GB	16MB	256KB	600MB IDE 4x	3348-3062	2270
Pentium 100	1.08GB	16MB	256KB	No	3348-3071	2350
Pentium 120	1.08GB	16MB	256KB	No	3348-3081	2710



Globalyst 630

	Description	Part No.	Price (£)
Base Models	DOS, Windows, Mouse	3348-2000	705
	DOS, Windows for Workgroups, Mouse	3348-3000	715
Processors	Pentium 75	3348-F001	315
	Pentium 90	3348-F002	605
	Pentium 100	3348-F003	810
	Pentium 120	3348-F004	1170
Memory	SIMMS - 8MB - non-parity	3348-F126	210
	SIMMS - 16MB - non-parity	3348-F127	420
	SIMMS - 32MB - non-parity	3348-F128	840
	SIMMS - 64MB Parity	3348-F113	2010
	Video - 1MB Upgrade	3348-F078	35
Keyboard	UK English	3348-F442	20
Storage Media	3.5 inch Flex Disk Drive - 1.44 MB	3348-F702	30
	Hard Disk Drive - 540 IDE	3348-F741	185
	Hard Disk Drive - 850MB IDE	3348-F742	240
	Hard Disk Drive - 1.08GB IDE	3348-F743	355
	Hard Disk Drive - 1GB SCSI*	3348-F750	495
	Hard Disk Drive - 2GB SCSI*	3348-F751	820
	Tape Drive - 2GB SCSI DAT	3348-F762	820
	CD ROM - 600MB SCSI* (quad speed)	3348-F598	155
	CD ROM - 600MB IDE (quad speed)	3348-F597	125
	Adapter Board - PCI/SCSI	3348-F063	175
	Business Audio	Adapter Board - 16 bit Sound Blaster compatible	3348-F226
Talkback stereo speakers with integrated microphone		3348-F218	35
LAN, ISDN & Modems	Adapter Board - ISA Ethernet (SMC8416)	3348-F364	75
	Adapter Board - PCI 10/100 Ethernet (SMC9332)	3348-F367	215
	Adapter Board - ISA Token Ring (OLICOM 3118)	3348-F388	195
	Adapter Board - PCI Token Ring (OLICOM 3136)	3348-F392	235
	Adapter Board - PCI Ethernet (SMC8432)	3348-F393	105
	Teles ISDN card	3348-F500	420
	Modem and software (data & fax: 14.4bps)	3348-F270	210
PCMCIA	Adapter Board - PCMCIA, 2X rear	3348-F710	185
	Adapter Board - PCMCIA, 2X front	3348-F711	185
Monitors	14 inch VGA mono, standard scan	3298-2131	136
	14 inch SVGA colour, 0.39, standard scan	3298-2232	210
	14 inch SVGA colour, 0.28, auto scan, DDC, MPR II	3298-2243	245
	15 inch ESVGA, 0.28, standard scan, MPR II	6332-0275	340
	17 inch, 0.27, digital auto scan, TCO'92,	3298-2286	700
	21 inch SVGA colour, 0.28, MPR II	6332-0290	1570

*All SCSI storage devices require PCI/SCSI adapter board (3348-F063). Please remember to add this to your configuration.

BASE MODEL INCLUDES:

- MINITOWER CABINET
- MAINBOARD
- 1MB VIDEO MEMORY
- 256KB CACHE
- DOS & PC&C VISTIUM SHARE SOFTWARE PRE-INSTALLED
- MOUSE
- ZIF SOCKET FOR FUTURE PENTIUM PROCESSOR TECHNOLOGY
- PLUG AND PLAY UTILITIES

BIOS

- FLASHBIOS; PHOENIX
- PLUG & PLAY

MEMORY

- SUPPORTS 8 TO 192MB OF 70NS, 72 PIN INDUSTRY STANDARD SIMMS

SLOTS

- (5) FULL SIZED ISA SLOTS
- (3) FULL SIZED PCI SLOTS

VIDEO

- ADVANCED S3 TRIO 64 PCI GRAPHICS CONTROLLER
- 1MB VRAM UPGRADABLE TO 2MB
- MAXIMUM RESOLUTION OF UP TO 1280 x 1024 x 256 COLOURS AT 75HZ REFRESH RATE

DRIVE BAYS

- (3) 3.5" DRIVE POSITIONS (ONE ACCESSIBLE FOR 1.44MB FLEX DISK DRIVE, TWO INTERNAL BAYS)
- (3) ACCESSIBLE 5.25" DRIVE POSITIONS

OS CERTIFICATION

- MICROSOFT DOS & WINDOWS
- WINDOWS 95
- WINDOWS FOR WORKGROUPS
- WINDOWS NT
- NOVELL UNIXWARE & NETWARE
- SCO UNIX ODT
- IBM OS/2 & OS/2 WARP