

USER'S REFERENCE

ADAPTEC SCSI CARD 29160N
ULTRA160 SCSI CONTROLLER



Adaptec, Inc.
691 South Milpitas Boulevard
Milpitas, CA 95035

© 1999 Adaptec, Inc.
All rights reserved. Adaptec, and the Adaptec
logo are trademarks of Adaptec, Inc. which
may be registered in some jurisdictions.

Printed in Singapore
STOCK NO.: 512515-03, Rev. A RAC 12/99
(SRC: 512515-00, Ver. AA)

▼▼▼▼ Adaptec SCSI Card 29160N
Ultra160 SCSI Controller

User's Reference



—

—

—

—

—

—

—

—

▼▼▼▼ Contents

Overview 1

Ultra160 SCSI on the Adaptec SCSI Card 29160N 1
Understanding SCSI 1
SCSI IDs 2
Terminating the SCSI Bus 3

Troubleshooting 5

Troubleshooting Checklist 5
Troubleshooting in Windows 95/98 6
Common Error Messages 10

Using the Adaptec SCSI Card 29160N and SCSI Devices 12

Using SCSI Devices 12
 SCSI Hard Disk Drives 12
 Ultra160 Hard Disk Drives 13
 Scanners 13
Installing Multiple SCSI Cards 14
Connecting the LED Connector 15
Using SCSI and EIDE Devices 16
Replacing a Non-Adaptec SCSI Card with an Adaptec SCSI Card 16

Configuring the

Adaptec SCSI Card 29160N with SCSISelect 17

Starting SCSISelect 19
 Exiting SCSISelect 19
Using SCSISelect Settings 19
 Basic Host Adapter Options 20
 Boot Device Options 20

Adaptec SCSI Card 29160N User's Reference

SCSI Device Configuration Options 20

Advanced Configuration Options 22

Using SCSI Disk Utilities 24

Connecting SCSI Devices 25

Maximum Cable Lengths 26

Overview

Ultra160 SCSI on the Adaptec SCSI Card 29160N

The Adaptec SCSI Card 29160N supports Ultra160 SCSI devices. Ultra160 is a new generation of SCSI technology that expands SCSI performance from 40 MBytes/sec to 160 MBytes/sec. In addition to providing much greater performance, Ultra160 SCSI increases the maximum allowable cable length from 3 meters to 12 meters for improved connectivity and flexibility.

The Adaptec SCSI Card 29160N combines this Ultra160 SCSI technology with Adaptec's SpeedFlex™ technology. SpeedFlex allows the Adaptec SCSI Card 29160N to be backwards compatible with previous generations of SCSI products, while allowing newer Ultra160 SCSI devices to operate at the higher 160 MBytes/sec rate and increased cable length.

Understanding SCSI

SCSI (pronounced "scuzzy") stands for Small Computer Systems Interface. SCSI is an industry standard computer interface for connecting SCSI devices (such as a hard disk drive, CD-ROM drive, or scanner) to a common SCSI bus.

A SCSI bus is an electrical pathway that consists of a SCSI adapter card (such as the Adaptec SCSI Card 29160N) installed in a computer and one or more SCSI devices. SCSI cables are used to connect the devices to the SCSI adapter card.

For the SCSI bus to function properly, a unique SCSI ID must be assigned to the SCSI card and each SCSI device connected to it, and the SCSI bus must be properly terminated.



Note: The Adaptec SCSI Card 29160N is designed for computer system original equipment manufacturers (OEMs). Product specifications are sometimes tailored to specific design needs from different OEMs. Use this product with the original computer system designed by the OEM. Adaptec assumes no responsibility for incompatibility or consequential damages when using this product with other systems. All support and services are provided by the system OEMs.

SCSI IDs

Each device attached to the Adaptec SCSI Card 29160N, as well as the Adaptec SCSI Card 29160N itself, must be assigned a unique SCSI ID number from 0 to 15. A SCSI ID uniquely identifies each SCSI device on the SCSI bus and determines priority when two or more devices are trying to use the SCSI bus at the same time.

Refer to the device's documentation to set the SCSI ID. Here are some general guidelines for SCSI IDs:

- For internal SCSI devices, the SCSI ID usually is set by configuring a jumper on the device.
- For external SCSI devices, the SCSI ID usually is set with a switch on the back of the device.
- SCSI ID numbers don't have to be sequential, as long as the Adaptec SCSI Card 29160N and each device has a different number. For example, you can have an internal SCSI device with ID 0, and an external SCSI device with ID 6.
- SCSI ID 7 has the highest priority on the SCSI bus. The priority of the remaining IDs, in descending order, is 6 to 0, 15 to 8.
- The Adaptec SCSI Card 29160N is preset to SCSI ID 7 and should not be changed. This gives it the highest priority on the SCSI bus.
- Most internal SCSI hard disk drives come from the factory preset to SCSI ID 0.

- If you have 8-bit (or Narrow) SCSI devices, they must use SCSI IDs 0, 1, 2, 3, 4, 5, or 6. SCSI ID 0 is recommended for the first SCSI hard disk drive.
- If you are booting your computer from a SCSI hard disk drive connected to the Adaptec SCSI Card 29160N, the Boot Target ID setting in the *SCSISelect* utility must correspond to the SCSI ID of the device from which you are booting. By default, the Boot Target ID is set to 0. We recommend that you do not change this setting.
- In Windows® 95/98, you can use the Device Manager to determine which SCSI ID is assigned to each installed SCSI device.

Terminating the SCSI Bus

To ensure reliable communication on the SCSI bus, the ends of the SCSI bus must be properly terminated. This is accomplished when the device at the end of each cable, or the end of the cable itself, has a terminator installed (or enabled). Terminators must be removed, or termination must be disabled, on devices between the ends of each cable.

Since the method for terminating a SCSI device can vary widely, refer to the device's documentation for instructions on how to enable or disable termination. Here are some general guidelines for termination:

- Internal Ultra160 SCSI devices come from the factory with termination disabled and cannot be changed. Proper termination for internal Ultra160 SCSI devices is provided by the built-in terminator at the end of the Ultra160 SCSI internal SCSI cable.
- Termination on non-Ultra160 internal SCSI devices usually is controlled by manually setting a jumper or a switch on the device, or by physically removing or installing one or more resistor modules on the device.
- Termination on external SCSI devices usually is controlled by installing or removing a SCSI terminator. On some external devices, termination is controlled by setting a switch on the back of the SCSI device.

Adaptec SCSI Card 29160N User's Reference

- By default, termination on the Adaptec SCSI Card 29160N itself is set to *Automatic* (the preferred method). We recommend that you do not change this default setting.
- Most Ultra SCSI devices come from the factory with termination enabled.

Troubleshooting

Most problems can be resolved by following the recommendations in the Troubleshooting Checklist below. If you still experience problems after following the recommendations, continue with the rest of this section.

Troubleshooting Checklist

Most problems with using the Adaptec SCSI Card 29160N result from errors in preparing and connecting devices on the SCSI bus. If you have problems, check these items first.



Note: If you have problems with a specific SCSI device when other connected SCSI devices are working correctly, please contact the manufacturer of the problem device for troubleshooting information.

- Are all SCSI devices turned on?
- Are all SCSI cables and power cables properly connected?
- Is the Adaptec SCSI Card 29160N firmly seated and secured in the PCI expansion slot?
- Is the PCI expansion slot compliant with PCI Rev. 2.1 or higher, and does it support Bus Mastering?
- Are all SCSI devices and the Adaptec SCSI Card 29160N assigned unique SCSI IDs?
- Are all SCSI devices terminated properly?

Troubleshooting in Windows 95/98

When I start Windows 95/98, the system locks up when the Windows logo is displayed. How can I get the system to start so that I can verify that the SCSI card is functioning normally?

- 1 Start or restart your computer.
- 2 (For Windows 95:) When the message "Starting Windows 95" appears, press and release the **F8** function key while the text is on your screen.
(For Windows 98:) When the message "Starting Windows 98" appears, press and release the **Ctrl** key while the text is on your screen.)
- 3 From the menu that is displayed, select **Safe Mode**. (It may take several minutes for Windows 95/98 to load.)
- 4 If the system completes the boot to the desktop, the core software is functional; resources, software conflicts, and /or hardware need to be checked.
- 5 If the system still fails to boot, and the boot drive is connected to an EIDE controller, shut down the system, remove the Adaptec SCSI Card 29160N, and restart the computer.
- 6 Verify that an IRQ is available by viewing resources in System Properties.
- 7 Under the Control Panel, verify that the operating system is set to **Optimal Performance** by checking the Performance tab under System Properties. (Make sure you are not in Safe Mode.)

How can I tell if the Adaptec SCSI Card 29160N driver is loading properly?

- 1 Right click on the **My Computer** icon on the Windows desktop.
- 2 Select **Properties** from the menu.
- 3 Click the **Device Manager** tab.

- 4 Double-click the **SCSI Controller** icon. The software driver for the Adaptec SCSI Card 29160N is listed as “29160, 29160N, 29160B, CPQ29160, Ultra160 PCI SCSI Controller.”
 - If the driver is listed, the Adaptec SCSI Card 29160N driver is loading properly.
 - If the driver is listed but has an exclamation mark inside a yellow circle the software driver may conflict with other hardware using the same resources. Double-click the icon to see the device status and possible solutions.
 - If the driver is listed but has an “X” inside a red circle, the Adaptec SCSI Card 29160N software driver is disabled and isn’t loading.
 - If the SCSI Controller icon or the Adaptec SCSI Card 29160N software driver is not listed, reinstall the driver.



Note: In order to accommodate any special OEM system requirements, Adaptec may provide special driver software that is different from Adaptec standard driver software if the board is pre-installed. Be sure to use the driver software provided by the computer manufacturer.

An “X” inside a red circle appears with the Adaptec SCSI Card 29160N software driver in Device Manager. What does this mean?

It means that the Adaptec SCSI Card 29160N software driver is disabled and isn’t loading.

To enable the driver

- 1 Double-click the Adaptec SCSI Card 29160N software driver in Device Manager.
- 2 Under the **General** tab, click the Original Configuration (current) box.

Adaptec SCSI Card 29160N User's Reference

What if there is no SCSI Controller icon under Device Manager, or the software driver for the Adaptec SCSI Card 29160N does not appear under Device Manager?

If the SCSI Controller icon or the software driver do not appear

- 1** Double-click the **Add New Hardware** icon in Control Panel.
- 2** Select **Yes** on the second screen of the Add New Hardware Wizard to have Windows search for the Adaptec SCSI Card 29160N.
- 3** Follow the on-screen instructions.

If Windows 95/98 does not detect the Adaptec SCSI Card 29160N, run the Add New Hardware Wizard again:

- 1** Double-click the **Add New Hardware** icon in Control Panel.
- 2** Select **No** on the second screen of the wizard.
- 3** Select **SCSI controllers** on the next screen.
- 4** Select **29160, 29160N, 29160B, CPQ29160, Ultra160 PCI SCSI Controller**.

How can I check the status of a resource such as IRQ, Memory, or I/O?

- 1** Right click on **My Computer**.
- 2** Select **Properties** from the menu.
- 3** Click the **Device Manager** tab.
- 4** Double-click the **Computer** icon.
- 5** On the View Resources tab, click the option button for the type of resource you want to check:
 - Interrupt Request (IRQ)
 - Input/Output Address (I/O)
 - Direct Memory Access (DMA)
 - Memory

Troubleshooting

- 6 The setting and the hardware using the setting are displayed.
 - If a specific resource is not listed, the resource is not used by a device.
 - If a resource is listed more than once, the resource is used by more than one device.
 - If a resource is used by an unknown device, the resource is used but the device using the resource cannot be detected. (This condition is most common.)
- 7 Click cancel to close the windows, then close Control Panel.

How do I use the Hardware Conflict Troubleshooter in Windows 95/98?

- 1 Click the **Start** button, then click **Help**.
- 2 From the Contents tab, double-click **Troubleshooting**. (In Windows 98, click **Troubleshooting** and then click **Windows 98 Troubleshooting**.)
- 3 Double-click **if you have a hardware conflict**.
- 4 Follow the step-by-step instructions in Windows Help.

Common Error Messages

Here is what you should do if the following messages appear at bootup:

“Device connected, but not ready”

The host received no answer when it requested data from an installed SCSI device.

- 1 Run *SCSISelect*[®] and set the Send Start Unit Command to **Yes** for the particular SCSI device ID. See *Starting SCSISelect* on page 19.
- 2 Ensure that the device is set to spin up when the power is switched on. The spin up option is typically set by a jumper. (See the documentation for the device.)

“Start unit request failed”

The SCSI card BIOS was unable to send a Start Unit Command to the device. Run *SCSISelect* and disable the Send Start Unit Command for the device.

“Time-out failure during...”

An unexpected time-out occurred.

- 1 Verify that the SCSI bus is properly terminated.
- 2 Verify that all cables are properly connected.

Try disconnecting the SCSI device cables from the SCSI card and then starting the computer. If the computer successfully restarts, one of the SCSI devices may be defective.

“Attention! Too many devices are terminated on the SE connectors”¹

The SCSI card BIOS has detected that more than two devices have been terminated on the narrow SE SCSI segment. Verify the termination on the devices connected to the internal and external 50-pin connectors. Terminate *only* the SCSI device at the ends of the cable. Remove or disable the terminators on the SCSI devices between the ends of the cable.

¹ The termination detection feature is only implemented on the 50-pin internal Fast/Ultra-SE connectors. The 68-pin LVD/SE connector does not support this feature.

Troubleshooting

“Attention! Insufficient termination detected on the SE connectors”²

The SCSI card BIOS has detected that either *only one* or *no* devices have been terminated on the narrow SE SCSI segment. Verify the termination on the devices connected to the internal and external 50-pin connectors. Terminate the SCSI devices at the ends of the cable and leave the other devices unterminated.

² The termination detection feature is only implemented on the 50-pin internal Fast / Ultra-SE connectors. The 68-pin LVD / SE connector does not support this feature.

Using the Adaptec SCSI Card 29160N and SCSI Devices

This section provides useful information on using the Adaptec SCSI Card 29160N and your SCSI devices. For specific information, refer to the SCSI device documentation.


Using SCSI Devices

SCSI Hard Disk Drives

- Every SCSI hard disk drive must be physically low-level formatted, partitioned, and logically formatted before it can be used to store data. If your SCSI hard disk drive has not already been formatted at the factory, and if your system is running under DOS, Windows 3.x, or Windows 95/98, you can format the disk with the DOS Fdisk and Format commands. (See the DOS and Windows documentation for more information.) To format SCSI hard disk drives running under other operating systems, see the operating system documentation.
- If your PC boots from a SCSI hard disk drive, ensure that the Hard Disk (or Drives) setting in your computer's CMOS setup program is set to **None** or **No Drives Installed**, as is required for SCSI hard disk drives. See your computer documentation for details.
- If both SCSI and non-SCSI disk drives are installed, then the non-SCSI disk drive is typically the boot drive. If your computer supports BBS (BIOS Boot Specification), both SCSI and non-SCSI disk drives can coexist and you can specify which drive to boot from. Refer to your computer documentation for more information.

Ultra160 Hard Disk Drives

- We recommend keeping your Ultra160 SCSI devices separate from your non-Ultra160 SCSI devices. Connecting a non-Ultra160 SCSI hard disk drive to the Ultra160 SCSI connector on the Adaptec SCSI Card 29160N causes the Ultra160 SCSI segment of the SCSI bus to drop down to Ultra SCSI performance levels (40 MBytes / sec).
- Be sure to connect your Ultra160 SCSI hard disk drives to the LVD / SE SCSI connector on the Adaptec SCSI Card 29160N if you want Ultra160 performance (160 MBytes / sec).

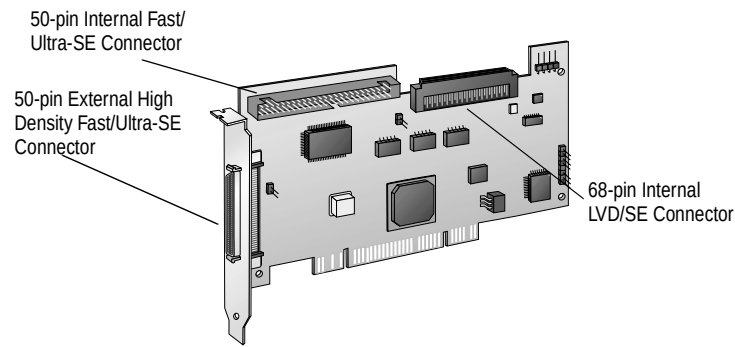

- Internal Ultra160 SCSI devices come from the factory with termination disabled and cannot be changed. Proper termination is provided by the terminator at the end of the internal Ultra160 SCSI cable.

Scanners

If you connect a scanner to the SCSI Card 29160N, you must install the scanner manufacturer's proprietary software drivers. See your scanner's documentation for details.

Installing Multiple SCSI Cards


- You can install multiple SCSI cards in your computer; you are limited only by the available system resources (for example, IRQ settings, I/O port addresses, BIOS addresses, and so forth).
- Each SCSI card you install forms a separate SCSI bus with a different set of SCSI devices. SCSI IDs can be reused as long as the ID is assigned to a device on a different SCSI card (for example, each SCSI card can have a device with SCSI ID 2).
- If you have two or more SCSI cards, enable the BIOS on the boot SCSI card only; disable the BIOS on the other SCSI cards.

Connecting the LED Connector

(Optional feature) Most computers have an LED disk activity light on the front panel of the system case. If you choose to disconnect the cable from the LED connector on the motherboard and connect it to the LED connector on the SCSI card as shown in the diagram below, the LED on the front panel of the computer will light whenever there is activity on the SCSI bus.



Note: If you are using non-SCSI disk drives, you may prefer not to connect your computer's LED to the SCSI card, since the LED will then no longer indicate disk activity on the other disk drives.

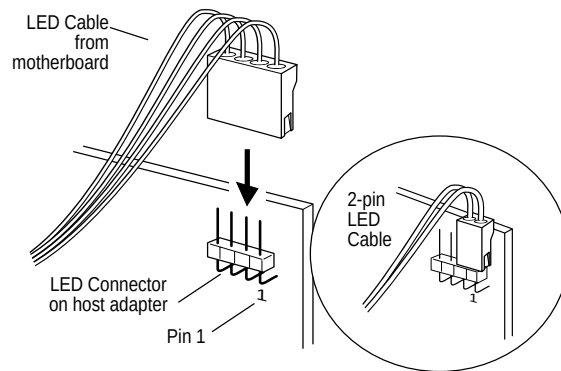

Using SCSI and EIDE Devices

- All Adaptec SCSI cards can coexist with another controller (EIDE, RLL, etc.) installed in the computer.
- If you have both an EIDE hard disk drive and a SCSI hard disk drive, the EIDE drive is typically the boot drive. In this case, disable the BIOS on the SCSI card (see *Advanced Configuration Options* on page 22). If your computer supports BBS, both SCSI and non-SCSI disk drives can coexist and you can specify which drive to boot from. Refer to your computer documentation for more information.
- You cannot connect an EIDE device to a SCSI card, or a SCSI device to an EIDE card (controller).
- Disable the BIOS on the SCSI card if no SCSI hard disk drives are installed (see *Advanced Configuration Options* on page 22).

Replacing a Non-Adaptec SCSI Card with an Adaptec SCSI Card

SCSI is standard, but how data is translated onto a hard disk drive is not. Each SCSI card manufacturer uses its own translation schemes for writing data to a disk. To use a hard disk drive that was previously connected to a non-Adaptec SCSI card, low-level format the drive after connecting it to the Adaptec SCSI card. (See *Using SCSI Disk Utilities* on page 24.)



Caution: A low-level format destroys all data on the drive. Be sure to back up your data before performing a low-level format.

Configuring the Adaptec SCSI Card 29160N with SCSISelect

SCSISelect, included with the Adaptec SCSI Card 29160N, enables you to change SCSI settings without opening the computer or handling the card. SCSISelect also enables you to low-level format or verify the disk media of your SCSI hard disk drives. The following table lists the available and default settings for each SCSISelect option.



Note: The default settings are appropriate for most systems. Run SCSISelect if you need to change or view current settings, or if you would like to run the SCSI disk utilities. See the descriptions of each option starting on page 19.

SCSISelect Options	Available Settings	Default Setting
Basic Host Adapter Options:		
Host Adapter SCSI ID	0-15	7
SCSI Parity Checking	Enabled, Disabled	Enabled
Host Adapter SCSI Termination:		
Ultra160-LVD Connector	Automatic, Enabled, Disabled	Automatic
Fast/Ultra-SE Connector	Automatic, Enabled, Disabled	Automatic
Boot Device Settings:		
Boot Target ID	0-15	0
Boot LUN Number ¹	0-7	0
SCSI Device Configuration Options:		
Maximum Sync Transfer Rate (MBytes/sec)	160.0, 80.0, 53.4, 40.0, 32.0, 26.8, 20.0, 16.0, 13.4, 10.0, ASYN	160.0
Enable Disconnection	Yes, No	Yes (Enabled)
Initiate Wide Negotiation	Yes, No	Yes (Enabled)

Adaptec SCSI Card 29160N User's Reference

SCSISelect Options	Available Settings	Default Setting
Send Start Unit Command	Yes, No	Yes (Enabled)
Enable Write Back Cache	Enabled, Disabled N/C (No Change)	N/C (No Change)
BIOS Multiple LUN Support	Yes, No	No (Disabled)
Include in BIOS Scan	Yes, No	Yes (Enabled)
Advanced Configuration Options:		
Reset SCSI Bus at IC Initialization	Enabled, Disabled	Enabled
Extended BIOS Translation for DOS Drives > 1 GByte ²	Enabled, Disabled	Enabled
Verbose/Silent Mode	Verbose, Silent	Verbose
Host Adapter BIOS	Enabled Disabled: Scan Bus Disabled: Not Scan	Enabled
Domain Validation ²	Enabled, Disabled	Enabled
Support Removable Disks Under BIOS as Fixed Disks ²	Boot Only, All Disks, Disabled	Disabled
Display <Ctrl> <A> Messages during BIOS Initialization ²	Enabled, Disabled	Enabled
BIOS Support for Bootable CD-ROMs ²	Enabled, Disabled	Enabled
BIOS Support for Int 13 Extensions ²	Enabled, Disabled	Enabled

¹ Setting is valid only if Multiple LUN Support is enabled.

² Settings are valid only if host adapter BIOS is enabled.

Starting SCSISelect

Follow these steps to start SCSISelect:

- 1 Turn on or restart your system.
During the startup process, pay careful attention to the messages that appear on your screen.
- 2 When the following message appears on your screen, press the **Ctrl-A** keys simultaneously (this message appears for only a few seconds):

Press <Ctrl><A> for SCSISelect (TM) Utility!
- 3 From the menu that appears, use the ↑ and ↓ keys to move the cursor to the option you want to select, then press **Enter**.



Note: If you have difficulty viewing the display, press **F5** to toggle between color and monochrome modes. (This feature may not work on some monitors.)

Exiting SCSISelect

Follow these steps to exit SCSISelect:

- 1 Press **Esc** until a message prompts you to exit (if you changed any settings, you are prompted to save the changes before you exit).
- 2 At the prompt, select **Yes** to exit, then press any key to reboot the computer. Any changes you made in SCSISelect take effect after the computer boots.

Using SCSISelect Settings

To select an option, use the ↑ and ↓ keys to move the cursor to the option, then press **Enter**.

In some cases, selecting an option displays another menu. You can return to the previous menu at any time by pressing **Esc**.

To restore the original SCSISelect default values, press **F6** from the main SCSISelect screen.

Basic Host Adapter Options

- **Host Adapter SCSI ID**—(Default: 7) Sets the SCSI ID for the SCSI card. The Adaptec SCSI Card 29160N is set at **7**, which gives it the highest priority on the SCSI bus. We recommend that you do not change this setting.
- **SCSI Parity Checking**—(Default: *Enabled*) When set to **Enabled**, verifies the accuracy of data transfer on the SCSI bus. Leave this setting enabled unless any SCSI device connected to the Adaptec SCSI Card 29160N does not support SCSI parity.
- **Host Adapter SCSI Termination**—(Default: *Automatic*) Determines the termination setting for the SCSI card. The default setting for both the Ultra160-LVD connector and Fast / Ultra-SE connector is *Automatic*. We recommend that you do not change these settings.

Boot Device Options

- **Boot Target ID**—(Default: 0) Specifies the SCSI ID of your boot device.
- **Boot LUN Number**—(Default: 0) Specifies which LUN (Logical Unit Number) to boot from on your boot device. This setting is not valid unless Multiple LUN Support is **Enabled** (see *Advanced Configuration Options* on page 22).

SCSI Device Configuration Options



Note: To configure settings for a SCSI device, you must know its SCSI ID (see *Using SCSI Disk Utilities* on page 24).

- **Maximum Sync Transfer Rate**—(Default: *160.0*) Determines the maximum synchronous data transfer rate the SCSI card supports. Use the maximum value of 160.0 MBytes / sec. If your device is not Ultra160, select a transfer rate of 10.0 MBytes / sec.
- **Enable Disconnection**—(Default: *Yes*) When set to **Yes**, allows the SCSI device to disconnect from the SCSI bus. Leave the setting at **Yes** if two or more SCSI devices are connected to the SCSI card. If only one SCSI device is connected, changing the setting to **No** results in slightly better performance.

Configuring the Adaptec SCSI Card 29160N with SCSISelect

- **Initiate Wide Negotiation**—(Default: *Yes*) When set to **Yes**, the SCSI card attempts 16-bit data transfer (wide negotiation). When set to **No**, the SCSI card uses 8-bit data transfer unless the SCSI device requests wide negotiation.



Note: Set Initiate Wide Negotiation to **No** if you are using an 8-bit SCSI device that hangs or exhibits other performance problems with 16-bit data transfer.

- **Send Start Unit Command**—(Default: *Yes*) When set to **Yes**, sends the Start Unit Command to the SCSI device at bootup.
- **Enable Write Back Cache**—(Default: *N/C*) Can be used to enable or disable the write-back cache on SCSI disk drives connected to the host adapter. Leave this option at its default setting.
- **BIOS Multiple LUN Support**—(Default: *No*) Leave this setting at **No** if the device does not have multiple LUNs. When set to **Yes**, the SCSI card BIOS provides boot support for a SCSI device with multiple LUNs.
- **Include in BIOS Scan**—(Default: *Yes*) When set to **Yes**, the SCSI card BIOS includes the device as part of its BIOS scan at bootup.

Advanced Configuration Options



Note: Do not change the Advanced Configuration Options unless absolutely necessary.

- **Reset SCSI Bus at IC Initialization**—(Default: *Enabled*) When set to **Enabled**, the SCSI card generates a SCSI bus reset during its power-on initialization and after a hard reset.
- **Extended BIOS Translation for DOS Drives > 1 GByte**—(Default: *Enabled*) When set to **Enabled**, provides an extended translation scheme for SCSI hard disks with capacities greater than 1 GByte. This setting is necessary only for MS-DOS 5.0 or above; it is not required for other operating systems, such as NetWare or UNIX.

Use the MS-DOS Fdisk command to partition a disk larger than 1 GByte controlled by the SCSI card BIOS, when using DOS, Windows 3.1.x, or Windows 95/98.



Caution: Back up your disk drives before changing the translation scheme.

- **Verbose/Silent Mode**—(Default: *Verbose*) When set **Verbose**, the SCSI card BIOS displays the host adapter model on the screen during system buildup. When set to **Silent**, the message will not be displayed during bootup.
- **Host Adapter BIOS (Configuration Utility Reserves BIOS Space)**—(Default: *Enabled*) Enables or disables the SCSI card BIOS.
 - Leave at **Enabled** to enable the SCSI card BIOS and allow it to scan and initialize all SCSI devices.
 - Set to **Disabled: Not scan** if the devices on the SCSI bus (for example, CD-ROM drives) are controlled by software drivers and do not need the BIOS, and you do not want the BIOS to scan the SCSI bus.
 - Set to **Disabled: Scan Bus** if you do not need the BIOS, but you want it to scan the SCSI devices on the bus.

Configuring the Adaptec SCSI Card 29160N with SCSISelect

- **Domain Validation**—(Default: *Enabled*) Determines what kinds of SCSI devices are connected and reduces data transfer speed if it detects older non-Ultra160 devices. Displays the resulting data transfer rate.
- **Support Removable Disks Under BIOS as Fixed Disks**—(Default: *Disabled*) Determines which removable-media drives are supported by the SCSI card BIOS. Choices are as follows:
 - **Boot Only**—Only the removable-media drive designated as the boot device is treated as a hard disk drive.
 - **All Disks**—All removable-media drives supported by the BIOS are treated as hard disk drives.
 - **Disabled**—No removable-media drives are treated as hard disk drives. Software drivers are required because the drives are not controlled by the BIOS.



Caution: Do not remove a removable-media cartridge from a SCSI drive controlled by the SCSI card BIOS while the drive is on. You may lose data. To allow removability of the media while the drive is on, install the removable-media software driver and set Support Removable Disks Under BIOS as Fixed Disks to **Disabled**.

- **Display <Ctrl> <A> Messages during BIOS Initialization**—(Default: *Enabled*) When set to **Enabled**, the SCSI card BIOS displays the Press <Ctrl> <A> for SCSISelect (TM) Utility! message on your screen during system bootup. If this setting is disabled, you can still invoke the SCSISelect Utility by pressing <Ctrl> <A> after the SCSI card BIOS banner appears.
- **BIOS Support for Bootable CD-ROMs**—(Default: *Enabled*) When set to **Enabled**, the SCSI card BIOS allows booting from a CD-ROM drive.
- **BIOS Support for Int 13 Extensions**—(Default: *Enabled*) When set to **Enabled**, the SCSI card BIOS supports Int 13h extensions as required by Plug-and-Play. The setting can be either enabled or disabled if your system is not Plug-and-Play.

Using SCSI Disk Utilities

To access the SCSI disk utilities, follow these steps:

- 1 Select the **SCSI Disk Utilities** option from the menu that appears after starting *SCSISelect*. *SCSISelect* scans the SCSI bus (to determine the devices installed) and displays a list of all SCSI IDs and the devices assigned to each ID.
- 2 Use the ↑ and ↓ keys to move the cursor to a specific ID and device, then press **Enter**.
- 3 A small menu appears, displaying the options Format Disk and Verify Disk Media.
 - **Format Disk**—Allows you to perform a low-level format on a hard disk drive. *Most SCSI disk devices are preformatted at the factory and do not need to be formatted again.*



Caution: A low-level format destroys all data on the drive. Be sure to back up your data before performing this operation. You *cannot* abort a low-level format once it is started.


- **Verify Disk Media**—Allows you to scan the media of a hard disk drive for defects. If the utility finds bad blocks on the media, it prompts you to reassign them; if you select *yes*, those blocks are no longer used. You can press **Esc** at any time to abort the utility.

Connecting SCSI Devices


Here are some examples of how you can connect internal and external SCSI devices to the SCSI Card 29160N.

To achieve maximum performance, attach the first device to the end connector (furthest from the SCSI card); attach other devices to the connectors that are closer to the SCSI card.

The following example shows SCSI devices connected to all three connectors.

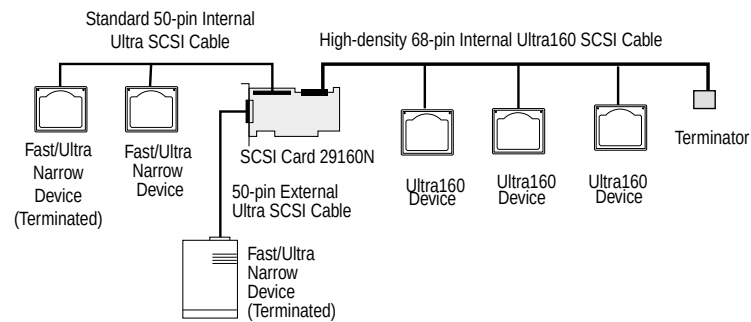

The following example shows SCSI devices connected to the two internal connectors.

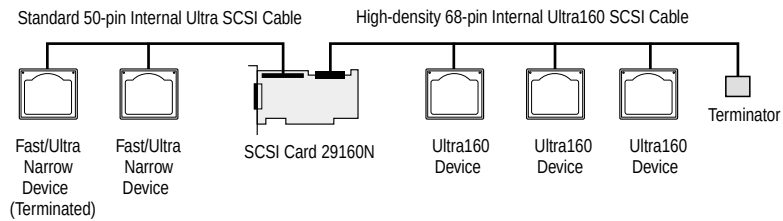

Maximum Cable Lengths

The total length of cabling (internal and external) on the SCSI bus cannot exceed the maximum lengths listed in the following table.

Maximum Cable Length	Data Transfer Rate	Maximum Devices Supported
12 m (39.4 ft)	Ultra160 SCSI (160 MBytes/sec) ¹	15
3 m (9.8 ft)	Fast SCSI (10 MBytes/sec)	7
3 m (9.8 ft)	Ultra SCSI (40 MBytes/sec for 16-bit, 20 MBytes/sec for 8-bit)	4
1.5 m (4.9 ft)	Ultra SCSI (40 MBytes/sec for 16-bit, 20 MBytes/sec for 8-bit)	5-8 ²

¹ Mixing Fast/Ultra devices with Ultra160 SCSI devices causes the entire SCSI bus to default to Ultra SCSI speeds and cable requirements.

² Ultra SCSI data transfer rates do not currently support more than eight devices.



Copyright

© 1999 Adaptec, Inc. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written consent of Adaptec, Inc., 691 South Milpitas Blvd., Milpitas, CA 95035.

Trademarks

Adaptec, the Adaptec logo, AHA, SpeedFlex, and SCSI*Select* are trademarks of Adaptec, Inc. which may be registered in some jurisdictions. Window, Windows 95 / 98, and Windows NT are registered trademarks of Microsoft Corporation in the U.S. and other countries used under license. All other trademarks are owned by their respective owners.

Changes

The material in this document is for information only and is subject to change without notice. While reasonable efforts have been made in the preparation of this document to assure its accuracy, Adaptec, Inc. assumes no liability resulting from errors or omissions in this document, or from the use of the information contained herein.

Adaptec reserves the right to make changes in the product design without reservation and without notification to its users.

Disclaimer

IF THIS PRODUCT DIRECTS YOU TO COPY MATERIALS, YOU MUST HAVE PERMISSION FROM THE COPYRIGHT OWNER OF THE MATERIALS TO AVOID VIOLATING THE LAW WHICH COULD RESULT IN DAMAGES OR OTHER REMEDIES.

Regulatory Compliance Statements

Federal Communications Commission Radio Frequency Interference Statement


WARNING: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. However, if this equipment does cause interference to radio or television equipment reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/television technician for help.

Use a shielded and properly grounded I/O cable and power cable to ensure compliance of this unit to the specified limits of the rules.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

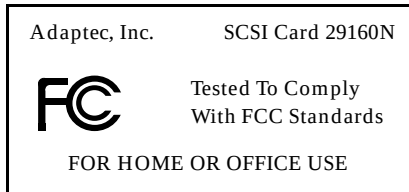

Canadian Compliance Statement



This digital apparatus does not exceed the Class B limits for radio noise emissions from digital apparatus as set out in the radio interference of Industry Canada.

Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils.

European Union Compliance Statement

This Information Technology Equipment has been tested and found to comply with the following European directives:



EMC Directive 89/336/EEC

EN 50081-1 (1992)

EN5022 (1994) Class B

EN 50082-1 (1992)

EN61000-4-2 (1998)

EN61000-4-3 (1998)

EN61000-4-4 (1995)

Australian/New Zealand Compliance Statement



This device has been tested and found to comply with the limits for a Class B digital device, pursuant to the Australian / New Zealand standard AS / NZS 3548 set out by the Spectrum Management Agency.

Japanese Compliance Symbol



Adaptec Software License Agreement

In return for acquiring a license to use the software ("Software") and related documentation, you agree to the following terms and conditions:

- 1 License: This Agreement grants you, the Licensee, a license to:
 - a use the Software on a single computer system which incorporates an Adaptec SCSI Card, or in the case of a multi-user or networked system which permits access to the Software by more than one user at the same time, at a single working location.
 - b make one copy of the Software in machine readable form solely for back-up purposes provided you reproduce Adaptec's copyright notice and any proprietary legends.
- 2 Restrictions: You may not distribute copies of the Software to others or electronically transfer the Software from one computer to another over a network. You may not use the Software from multiple locations of a multi-user or networked system at any one time. The Software contains trade secrets and in order to protect them you may not decompile, reverse engineer, disassemble, or otherwise reduce the Software to a human-perceivable form. **YOU MAY NOT MODIFY, ADAPT, TRANSLATE, RENT, LEASE, LOAN, RESELL FOR PROFIT, DISTRIBUTE, NETWORK OR CREATE DERIVATIVE WORKS BASED UPON THE SOFTWARE OR ANY PART THEREOF.**
- 3 Ownership of Software: As Licensee, you own the media upon which the software is fixed, but Adaptec retains title and ownership of the Software recorded on the original media and all subsequent copies of the Software regardless of the form or media in which or on which the original and other copies may exist. This license is not a sale of the Software or any copy.
- 4 Confidentiality: You agree to maintain the Software in confidence and to not disclose the Software to any third party without the express written consent of Adaptec. You further agree to take all reasonable precautions to preclude access of unauthorized persons to the Software.
- 5 Term: This license is effective until January 1, 2042, unless terminated earlier. You may terminate the license at any time by destroying the Software (including the related documentation) together with all copies or modifications in any form. Adaptec will have the right to terminate your license immediately if you fail to comply with any term or condition of this Agreement. Upon any termination, including termination by you, you must destroy the Software (including the related documentation) together with all copies or modifications in any form.
- 6 Limited Warranty: Adaptec warrants only that the media upon which the Software is furnished will be free from defects in material or workmanship under normal use and service for a period of thirty (30) days from the date of delivery to you. **ADAPTEC DOES NOT AND CANNOT WARRANT THE PERFORMANCE OR RESULTS YOU MAY OBTAIN BY USING THE SOFTWARE OR DOCUMENTATION. THE FOREGOING STATES THE SOLE AND EXCLUSIVE REMEDIES ADAPTEC WILL PROVIDE FOR BREACH OF WARRANTY. EXCEPT FOR THE FOREGOING LIMITED WARRANTY, ADAPTEC MAKES NO WARRANTIES, EXPRESS OR IMPLIED, AS TO NONINFRINGEMENT OF THIRD PARTY RIGHTS, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** Some states do not allow the exclusion of implied warranties or limitations on how long an implied warranty may last, so the above limitations may not apply to you. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.
- 7 Limitation of Liability: **IN NO EVENT WILL ADAPTEC BE LIABLE TO YOU FOR ANY SPECIAL DAMAGES, INCLUDING ANY LOST PROFITS, LOST SAVINGS OR OTHER INCIDENTAL OR CONSEQUENTIAL DAMAGES, EVEN IF ADAPTEC HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, OR FOR ANY CLAIM BY ANY OTHER PARTY.** Some states do not allow the exclusion or limitation of special, incidental, or consequential damages, so the above limitation or exclusion may not apply to you.
- 8 Limitation of Remedies: Adaptec's entire liability and your exclusive remedy shall be:
 - a the replacement of any media not meeting Adaptec's limited warranty which is returned to Adaptec; or
 - b if Adaptec or its distributor is unable to deliver replacement media which is free of defects in materials or workmanship, you may terminate this Agreement by returning the Software and your money will be refunded.

- 9 Export: You acknowledge that the laws and regulations of the United States restrict the export and re-export of the Software. You agree that you will not export or re-export the Software or media in any form without the appropriate United States and foreign government approval.
- 10 U.S. Government Restricted Rights Legend for Units of the DoD: Use, duplication or disclosure by the Government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at 252.227-7013. Adaptec, Inc., 691 South Milpitas Boulevard, Milpitas, California 95035.
- 11 U.S. Government Restricted Rights Legend for Civilian Agencies: Use, reproduction or disclosure is subject to restrictions as set forth in subparagraphs (a) through (d) of the Commercial Computer Software - Restricted Rights clause at 52.227-19 and the limitations set forth in Adaptec, Inc.'s standard commercial agreement for this software. Unpublished - rights reserved under the copyright laws of the United States.
- 12 General: You acknowledge that you have read this Agreement, understand it, and that by opening the package you agree to be bound by its terms and conditions. You further agree that it is the complete and exclusive statement of the agreement between Adaptec and you which supersedes any proposal or prior agreement, oral or written, and any terms of this Agreement or any different terms will be enforceable against Adaptec unless Adaptec gives its express consent, including an express waiver of the terms of this Agreement, in a writing signed by an officer of Adaptec. You assume full responsibility for the use of the Software and agree to use the Software legally and responsibly. This Agreement shall be governed by California law except as to copyright matters which are covered by Federal law. This Agreement is deemed entered into at Milpitas, California by both parties. Should any provision of this Agreement be declared unenforceable in any jurisdiction, then such provision shall be deemed to be severable from this Agreement and shall not affect the remainder hereof. All rights in the Software not specifically granted in this Agreement are reserved by Adaptec.

Should you have any questions concerning this Agreement, you may contact Adaptec by writing to: Adaptec, Inc., Legal Department, 691 South Milpitas Boulevard, Milpitas, California 95035.

—

—

—

—

—

—

—

—