


SN75154 QUADRUPLER LINE RECEIVER

D899, NOVEMBER 1970—REVISED MAY 1990

- Satisfies Requirements of EIA Standard RS-232-C
- Input Resistance . . . 3 k Ω to 7 k Ω over Full RS-232-C Voltage Range
- Input Threshold Adjustable to Meet "Fail-Safe" Requirements Without Using External Components
- Built-In Hysteresis for Increased Noise Immunity
- Inverting Output Compatible With TTL
- Output With Active Pull-Up for Symmetrical Switching Speeds
- Standard Supply Voltages . . . 5 V or 12 V

D, J, OR N PACKAGE
(TOP VIEW)



†For function of R1, see schematic

description

The SN75154 is a monolithic Low-Power Schottky line receiver designed to satisfy the requirements of the standard interface between data terminal equipment and data communication equipment as defined by EIA standard RS-232-C. Other applications are for relatively short, single-line, point-to-point data transmission and for level translators. Operation is normally from a single 5-V supply; however, a built-in option allows operation from a 12-V supply without the use of additional components. The output is compatible with most TTL circuits when either supply voltage is used.

In normal operation, the threshold-control terminals are connected to the VCC1 terminal, even if power is being supplied via the alternate VCC2 terminal. This provides a wide hysteresis loop, which is the difference between the positive-going and negative-going threshold voltages. See typical characteristics. In this mode of operation, if the input voltage goes to zero, the output voltage will remain at the low or high level as determined by the previous input.

For fail-safe operation, the threshold-control terminals are open. This reduces the hysteresis loop by causing the negative-going threshold voltage to be above zero. The positive-going threshold voltage remains above zero as it is unaffected by the disposition of the threshold terminals. In the fail-safe mode, if the input voltage goes to zero or an open-circuit condition, the output will go to the high level regardless of the previous input condition.

The SN75154 is characterized for operation from 0°C to 70°C.

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

TEXAS
INSTRUMENTS


POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1990, Texas Instruments Incorporated

2-477


SN75154 **QUADRUPLE LINE RECEIVER**

logic symbol†




† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

logic diagram



schematic

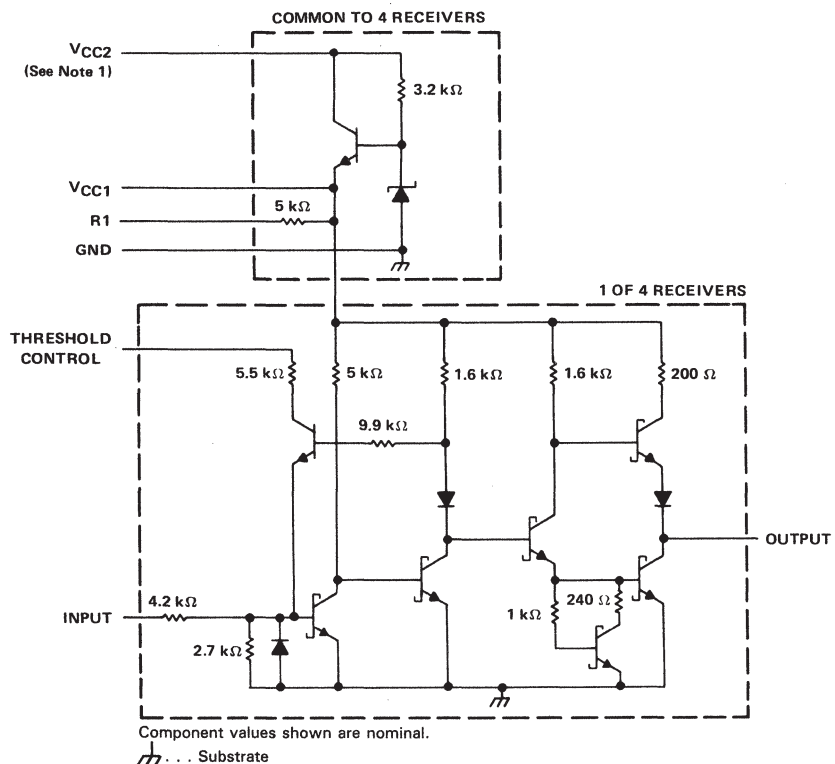

NOTE 1: When VCC1 is used, VCC2 may be left open or shorted to VCC1. When VCC2 is used, VCC1 must be left open or connected to the threshold control pins.

SN75154 QUADRUPLER LINE RECEIVER

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Normal supply voltage, V_{CC1} (see Note 2)	7 V
Alternate supply voltage, V_{CC2}	14 V
Input voltage	± 25 V
Continuous total power dissipation	See Dissipation Rating Table
Operating free-air temperature range	0°C to 70°C
Storage temperature range	-65°C to 150°C
Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds: J package	300°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds: D or N package	260°C

DISSIPATION RATING TABLE

PACKAGE	$T_A \leq 25^\circ\text{C}$ POWER RATING	DERATING FACTOR ABOVE $T_A = 25^\circ\text{C}$	$T_A = 70^\circ\text{C}$ POWER RATING
D	950 mW	7.6 mW/°C	608 mW
J	1025 mW	8.2 mW/°C	656 mW
N	1150 mW	9.2 mW/°C	736 mW

recommended operating conditions

	MIN	NOM	MAX	UNIT
Normal supply voltage, V_{CC1}	4.5	5	5.5	V
Alternate supply voltage, V_{CC2}	10.8	12	13.2	V
High-level input voltage, V_{IH} (see Note 3)	3		15	V
Low-level input voltage, V_{IL} (see Note 3)	-15		-3	V
High-level output current, I_{OH}			-400	μA
Low-level output current, I_{OL}			16	mA
Operating free-air temperature, T_A	0		70	°C

NOTES: 2. Voltage values are with respect to network ground terminal.

3. The algebraic convention, where the less positive (more negative) limit is designated as minimum, is used in this data sheet for logic and threshold levels only, e.g., when 0 V is the maximum, the minimum limit is a more negative voltage.

SN75154
QUADRUPLER LINE RECEIVER

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER			TEST FIGURE	TEST CONDITIONS	MIN	TYP [‡]	MAX	UNIT
V _{T+}	Positive-going threshold voltage	Normal operation	1		0.8	2.2	3	V
		Fail-safe operation			0.8	2.2	3	
V _{T−}	Negative-going threshold voltage	Normal operation	1		−3	−1.1	0	V
		Fail-safe operation			0.8	1.4	3	
V _{hys}	Hysteresis (V _{T+} − V _{T−})	Normal operation	1		0.8	3.3	6	V
		Fail-safe operation			0	0.8	2.2	
V _{OH}	High-level output voltage		1	I _{OH} = −400 μA	2.4	3.5		V
V _{OL}	Low-level output voltage		1	I _{OL} = 16 mA		0.29	0.4	V
r _i	Input resistance		2	ΔV _I = −25 V to −14 V	3	5	7	kΩ
				ΔV _I = −14 V to −3 V	3	5	7	
				ΔV _I = −3 V to 3 V	3	6	8	
				ΔV _I = 3 V to 14 V	3	5	7	
				ΔV _I = 14 V to 25 V	3	5	7	
V _{I(open)}	Open-circuit input voltage		3	I _I = 0	0	0.2	2	V
I _{OS}	Short-circuit output current [†]		4	V _{CC1} = 5.5 V, V _I = −5 V	−10	−20	−40	mA
I _{CC1}	Supply current from V _{CC1}		5	V _{CC1} = 5.5 V, T _A = 25°C		20	35	mA
I _{CC2}	Supply current from V _{CC2}			V _{CC2} = 13.2 V, T _A = 25°C		23	40	


[†]Not more than one output should be shorted at a time.

[‡]All typical values are at $V_{CC1} = 5 \text{ V}, T_A = 25^\circ \text{C}$.

switching characteristics, $V_{CC1} = 5 \text{ V}, T_A = 25^\circ \text{C}, N = 10$

PARAMETER		TEST FIGURE	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t _{PLH}	Propagation delay time, low-to-high-level output	6	C _L = 50 pF, R _L = 390 Ω		11		ns
t _{PHL}	Propagation delay time, high-to-low-level output				8		ns
t _{TLH}	Transition time, low-to-high-level output				7		ns
t _{THL}	Transition time, high-to-low-level output				2.2		ns

TYPICAL CHARACTERISTICS

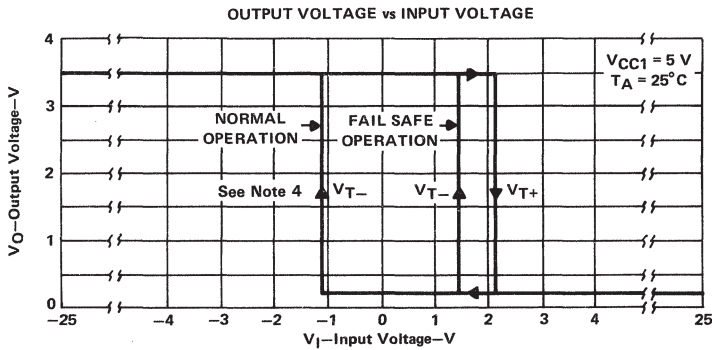

NOTE 4: For normal operation, the threshold controls are connected to V_{CC1} . For fail-safe operation, the threshold controls are open.

PARAMETER MEASUREMENT INFORMATION

d-c test circuits†

TEST TABLE

TEST	MEASURE	A	T	Y	VCC1 (PIN 15)	VCC2 (PIN 16)
Open-circuit input (fail safe)	V_{OH}	Open	Open	I_{OH}	4.5 V	Open
	V_{OH}	Open	Open	I_{OH}	Open	10.8 V
V_{T+} min,	V_{OH}	0.8 V	Open	I_{OH}	5.5 V	Open
V_{T-} min (fail safe)	V_{OH}	0.8 V	Open	I_{OH}	Open	13.2 V
V_{T+} min (normal)	V_{OH}	Note A	Pin 15	I_{OH}	5.5 V and T	Open
	V_{OH}	Note A	Pin 15	I_{OH}	T	13.2 V
V_{IL} max,	V_{OH}	-3 V	Pin 15	I_{OH}	5.5 V and T	Open
V_{T-} min (normal)	V_{OH}	-3 V	Pin 15	I_{OH}	T	13.2 V
V_{IH} min, V_{T+} max,	V_{OL}	3 V	Open	I_{OL}	4.5 V	Open
V_{T-} max (fail safe)	V_{OL}	3 V	Open	I_{OL}	Open	10.8 V
V_{IH} min, V_{T+} max (normal)	V_{OL}	3 V	Pin 15	I_{OL}	4.5 V and T	Open
	V_{OL}	3 V	Pin 15	I_{OL}	T	10.8 V
V_{T-} max (normal)	V_{OL}	Note B	Pin 15	I_{OL}	5.5 V and T	Open
	V_{OL}	Note B	Pin 15	I_{OL}	T	13.2 V

NOTES: A. Momentarily apply -5 V, then 0.8 V.
B. Momentarily apply 5 V, then ground.

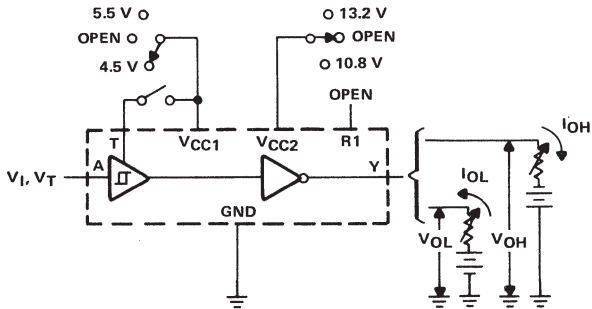


FIGURE 1. V_{IH} , V_{IL} , V_{T+} , V_{T-} , V_{OH} , V_{OL}

†Arrows indicate actual direction of current flow. Current into a terminal is a positive value.

SN75154
QUADRUPLE LINE RECEIVER

PARAMETER MEASUREMENT INFORMATION

d-c test circuits† (continued)

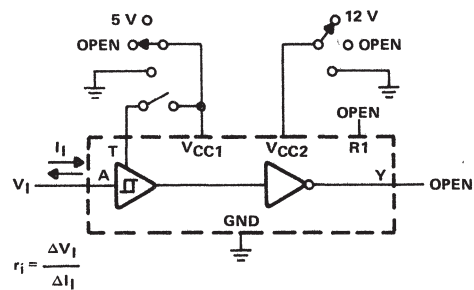


FIGURE 2. r_i

TEST TABLE

T	VCC1 (PIN 15)	VCC2 (PIN 16)
Open	5 V	Open
Open	GND	Open
Open	Open	Open
Pin 15	T and 5 V	Open
GND	GND	Open
Open	Open	12 V
Open	Open	GND
Pin 15	T	12 V
Pin 15	T	GND
Pin 15	T	Open


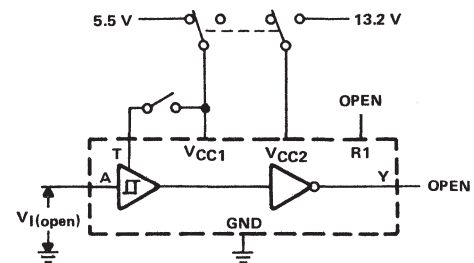


FIGURE 3. $V_I(\text{open})$


TEST TABLE

T	VCC1 (PIN 15)	VCC2 (PIN 16)
Open	5.5 V	Open
Pin 15	5.5 V	Open
Open	Open	13.2 V
Pin 15	T	13.2 V

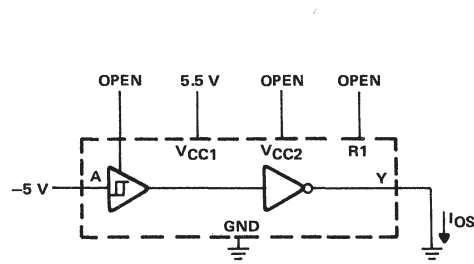

Each output is tested separately.

FIGURE 4. I_{OS}

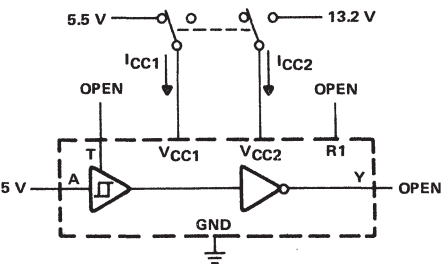


All four line receivers are tested simultaneously.

FIGURE 5. I_{CC}

†Arrows indicate actual direction of current flow. Current into a terminal is a positive value.

SN75154
QUADRUPLE LINE RECEIVER

PARAMETER MEASUREMENT INFORMATION

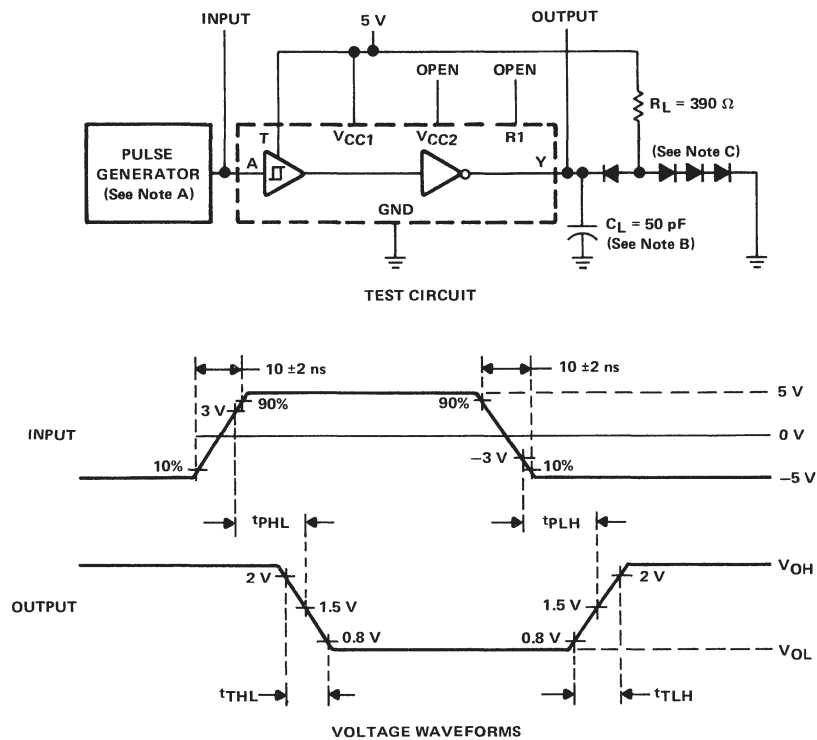

- NOTES: A. The pulse generator has the following characteristics: $Z_o = 50\ \Omega$, $t_w \leq 200\ \text{ns}$, duty cycle $\leq 20\%$.
B. C_L includes probe and jig capacitance.
C. All diodes are 1N3064.

FIGURE 6. SWITCHING TIMES